

3000 WATT PURE SINE WAVE DIGITAL INVERTER GENERATOR

Maxwatt® digital inverter generators offer the best in portable power while being light to carry, fuel efficient and super silent. Besides the electrical output being able to power all sensitive electronic equipment, our generators are also an essential part of recreational caravanning and camping AND also useful for home use as a backup power supply.



TELESCOPIC HANDLE


SUPER SILENT



STANDARD FEATURES:

- 3000 Starting Watts /2800 Running Watts
- 139 cc Petrol Engine
- Parallel Ready with no parallel box required
- 2 x 15 Amp IP44 weatherproof outlets
- Digital Display indicating Voltage, Frequency, Total Running Hours
- 5V 1,5 Amp USB Outlet
- 6 L Fuel Tank Capacity 5 Hours Run time at 50% load or 3 hours at 100% load
- 65 db Noise Level at 75% Load
- Recoil Starting Method
- 2 Year Maxwatt® Warranty

Control Panel Functions

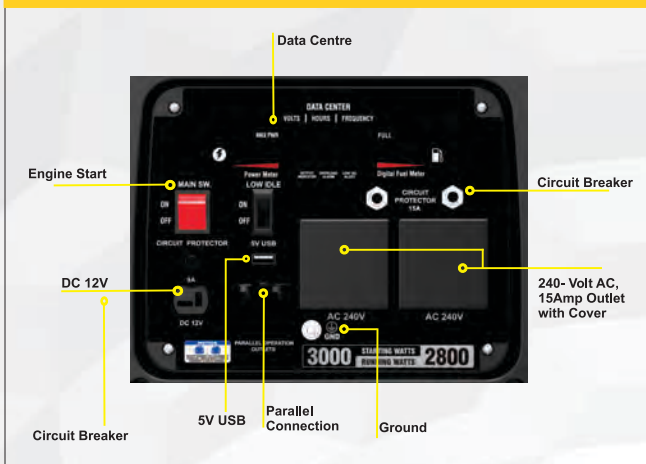

DOUBLE POWER
WITH PARALLEL CONNECTIVITY

3000W

MAXIMUM RATED OUTPUT



2 YEAR

WARRANTY

MX3000IS

ADDITIONAL FEATURES AND BENEFITS

- Digital Inverter Technology
- Pure sine wave inverter technology
- Parallel connection cable included
- No parallel box required
- Low Noise at 65DB
- 1.5 AMP USB Output
- Economy Low Idle Setting
- Smart Engine Control that reduces engine speed, depending on size of the load for better fuel efficiency.
- 3000W maximum output is one of the highest in its class that enables it to efficiently power up multiple electrical devices.
- Lightweight and portable at only 28kgs.
- It has a non-slip and ergonomically designed handle.
- The running time at 5 hrs at 50% load and 3 hrs at 100% load is achieved with the help of a 6 litre fuel tank.
- The pure sine wave technology not only safely powers sensitive equipment, it is also compliant with Australian EPA emission controls.
- It is a no fuss generator that is simply plug in and use – no assembly required.
- We offer a 2 year warranty to safeguard your investment.

SPECIFICATIONS

Voltage (V)	240
Amperage (A)	11.66
Displacement (cc)	139
Fuel Tank Capacity (L)	6
Noise Level (db's) at 7 m	65
Rate Power (Watts)	2800
Max. Power (Watts)	3000
Weight (net) (kg)	28
Ignition	Recoil Start
Rate Frequency (Hz)	50
Running Time @ 50% Load (hrs)	5
Running time @ 100% load (hrs)	3

REPAIRS AND TECHNICAL INFORMATION

www.maxwatt.com.au OR customercare@maxwatt.com.au



Generator Dimensions:

561mm L
348mm W
512mm H
28kg Weight

Box Dimensions:

615mm L
400mm W
560mm H
32kg Weight

2
YEAR
WARRANTY